

DGT1SAN



www.vetek.com

info@vetek.com


COMPACT, MULTIFUNCTION WEIGHT TRANSMITTER /INDICATOR, FOR DIN BAR.

It allows the direct reading and diagnostics of the connected weighing system.

The wide range of available interfaces, makes it easy to integrate the weighing with any automation system.

CE-M approved (OIML R-76 / EN 45501).

MID approved (OIML R-61).

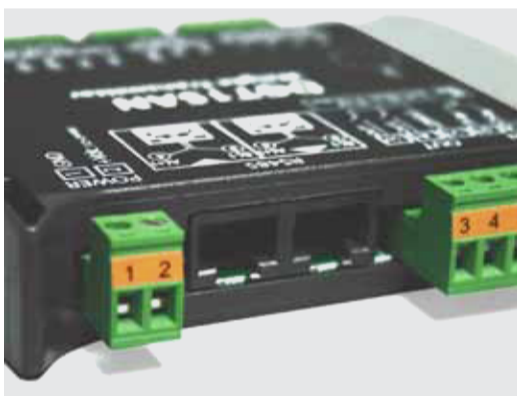

MAIN FEATURES

KEYBOARD : mechanics with 5 keys

DISPLAY: red LED with 6 digits and 6 LEDs for showing active functions

CASE : extraslim case with standard dimensions

CONNECTABLE CELLS : up to 16 analogue load cells with 350Ω input resistance

POWER SUPPLY: from 12 Vdc to 24 Vdc

STANDARD I/O

RS232 bidirectional port

Double RS485 port for a quick network connection and Modbus RTU communication

16-bit analogue output

2 digital outputs and 2 digital inputs with configurable functions

MAIN FUNCTIONS

Theoretical calibration

Fast calibration menu

High speed transmission of weight or converter points or microvolts (up to 240 tx/sec)

Advanced Serial Protocol

Alibi Memory

Setpoint \ Alarm \ Double speed relays

Peak relelevator

Quick setup from PC, through Dinitools

AVAILABLE OPTIONAL MODULES




Ethernet
TCP/IP & UDP



WiFi



Profibus DP



RS485