

PM C32 Precision Balances


'Advanced level' measurement of large masses with the highest accuracy in laboratory and industry



PM C32, d = 0.01 g



PM C32, d = 0.1 g



Radwag MonoBLOCK™, an innovative weighing system



PM C32: d = 0.5 g, d = 1 g



Weighing heavy loads with the maximum accuracy

Functions



Parts counting



Percent weighing



Under hook weighing



Proximity sensors



Alibi memory



Checkweighing



Statistics



GLP procedures



Replaceable unit



Multilingual menu

Technical Specifications

Reliable Results and High Measurement Precision

Excellent measurement parameters and performance enable applying PM C32 balances in laboratories and various branches of industry.

Radwag MonoBLOCK™, an Innovative Weighing System

The cutting edge technology of the measuring system guarantees stability of repeatability in time, where $sd < 1$, and a significant resistance to ambient conditions.

Weighing Heavy Loads With the Maximum Accuracy

It is possible to work with samples of different weight values, from few grams to several kilograms, wherein the highest measurement accuracy and excellent result repeatability are maintained.

Reliability and Safety

4-point protection system prevents balance overloading, this ensures safety in case too heavy load is applied onto the weighing pan. Robust design allows to operate the device even in the most challenging ambient conditions.

Ease of Use and Maximum Comfort of Operation

5" colour screen enables intuitive operation and easy access to numerous applications and functions. PM C32 program allows screen layout customization.

Automatic Adjustment

Internal adjustment system guarantees the highest accuracy and reliable measurements results.

Touch-Free Operation

Two programmable proximity sensors can be assigned with any function or application. The given function when assigned is both run and operated touch-free.

Numerous Options of Data Management

The instrument enables saving all completed measurements data as complex reports and graphs.

Technical Specifications

	PM 10.C32	PM 15.C32	PM 35.C32
Maximum capacity [Max]	10 kg	15 kg	35 kg
Preload	1 kg	1.5 kg	3.5 kg
Minimum load	0.5 g	0.5 g	5 g
Readability [d]	0.01 g	0.01 g	0.1 g
Verification scale interval [e]	—	—	1 g
Tare range	–10 kg	–15 kg	–35 kg
Repeatability*	0.004 g ($R_t \leq 0.5$ kg) 0.01 g (0.5 kg < $R_t \leq 10$ kg)	0.004 g ($R_t \leq 0.75$ kg) 0.015 g (0.75 kg < $R_t \leq 15$ kg)	0.04 g ($R_t \leq 1.75$ kg) 0.1 g (1.75 kg < $R_t \leq 35$ kg)
Linearity	± 0.03 g	± 0.03 g	± 0.3 g
Sensitivity temperature drift**	$2 \times 10^{-6} / ^\circ\text{C} \times R_t$	$2 \times 10^{-6} / ^\circ\text{C} \times R_t$	$2 \times 10^{-6} / ^\circ\text{C} \times R_t$
Minimum weight (U=1%, k=2)	0.82 g	0.82 g	8.2 g
Minimum weight (USP)	8.2 g	8.2 g	82 g
Stabilization time	3 s	3 s	3 s
Adjustment	internal	internal	internal
Verification	—	—	Yes
OIML Class	—	—	II
Indicator fastening	1.5 m cable	1.5 m cable	1.5 m cable
Terminal model	PUE C32 indicator	PUE C32 indicator	PUE C32 indicator
Display	5" graphic colour	5" graphic colour	5" graphic colour
Keypad	22-key membrane	22-key membrane	22-key membrane
Protection class	IP 43	IP 43	IP 43
Databases	5	5	5
Touch-free operation	2 programmable proximity sensors	2 programmable proximity sensors	2 programmable proximity sensors
USB-A	1	1	1
USB-B	1	1	1
RS 232	2	2	2
Ethernet	10 / 100 Mbit	10 / 100 Mbit	10 / 100 Mbit
Wireless connection	802.11 b/g/n	802.11 b/g/n	802.11 b/g/n
IN/OUT	4 × IN, 4 × OUT	4 × IN, 4 × OUT	4 × IN, 4 × OUT
Power supply	12 ÷ 16 V DC	12 ÷ 16 V DC	12 ÷ 16 V DC
Power consumption	15 W	15 W	15 W
Operating temperature	+10 ÷ +40 °C	+10 ÷ +40 °C	+10 ÷ +40 °C
Atmospheric humidity***	40 ÷ 80 %	40 ÷ 80 %	40 ÷ 80 %
Transport and storage temperature	–10 ÷ +50 °C	–10 ÷ +50 °C	–10 ÷ +50 °C
Weighing pan dimensions	200 × 185 mm	200 × 185 mm	347 × 259 mm
Weighing device dimensions	508 × 296 × 115 mm	508 × 296 × 115 mm	508 × 296 × 115 mm
Net weight	10 kg	10 kg	11 kg
Gross weight	12.2 kg	12.2 kg	13.2 kg
Packaging dimensions	520 × 520 × 280 mm	520 × 520 × 280 mm	520 × 520 × 280 mm

Rt net weight

* repeatability is expressed as a standard deviation from 10 weighing cycles

** parameter determined in the following temperature range: +15 ÷ +35 °C

*** non-condensing conditions

In accordance with type approval, the balance parameters are maintained in temperature range: +15 ÷ +35 °C.

	PM 50.C32	PM 60.05.C32	PM 60.1.C32
Maximum capacity [Max]	50 kg	60 kg	60 kg
Preload	5 kg	—	—
Minimum load	5 g	0.5 g	1 g
Readability [d]	0.1 g	0.01 g	0.1 g
Verification scale interval [e]	1 g	—	1 g
Tare range	–50 kg	–60 kg	–60 kg
Repeatability*	0.04 g ($R_t \leq 2.5$ kg) 0.15 g (2.5 kg < $R_t \leq 50$ kg)	0.2 g ($R_t \leq 3$ kg) 0.4 g (3 kg < $R_t \leq 60$ kg)	0.4 g ($R_t \leq 3$ kg) 0.8 g (3 kg < $R_t \leq 60$ kg)
Linearity	± 0.3 g	± 1.5 g	± 3 g
Sensitivity temperature drift**	$2 \times 10^{-6} / ^\circ\text{C} \times R_t$	$2 \times 10^{-6} / ^\circ\text{C} \times R_t$	$2 \times 10^{-6} / ^\circ\text{C} \times R_t$
Minimum weight (U=1%, k=2)	8.2 g	41 g	82 g
Minimum weight (USP)	82 g	410 g	820 g
Stabilization time	3 s	3 s	3 s
Adjustment	internal	internal	internal
Verification	Yes	—	—
OIML Class	II	—	—
Indicator fastening	1.5 m cable	1.5 m cable	1.5 m cable
Terminal model	PUE C32 indicator	PUE C32 indicator	PUE C32 indicator
Display	5" graphic colour	5" graphic colour	5" graphic colour
Keypad	22-key membrane	22-key membrane	22-key membrane
Protection class	IP 43	IP 43	IP 43
Databases	5	5	5
Touch-free operation	2 programmable proximity sensors	2 programmable proximity sensors	2 programmable proximity sensors
USB-A	1	1	1
USB-B	1	1	1
RS 232	2	2	2
Ethernet	10 / 100 Mbit	10 / 100 Mbit	10 / 100 Mbit
Wireless connection	802.11 b/g/n	802.11 b/g/n	802.11 b/g/n
IN/OUT	4 × IN, 4 × OUT	4 × IN, 4 × OUT	4 × IN, 4 × OUT
Power supply	12 ÷ 16 V DC	12 ÷ 16 V DC	12 ÷ 16 V DC
Power consumption	15 W	15 W	15 W
Operating temperature	+10 ÷ +40 °C	+10 ÷ +40 °C	+10 ÷ +40 °C
Atmospheric humidity***	40 ÷ 80 %	40 ÷ 80 %	40 ÷ 80 %
Transport and storage temperature	–10 ÷ +50 °C	–10 ÷ +50 °C	–10 ÷ +50 °C
Weighing pan dimensions	347 × 260 mm	500 × 400 mm	500 × 400 mm
Weighing device dimensions	508 × 296 × 115 mm	640 × 400 × 115 mm	640 × 400 × 115 mm
Net weight	11 kg	17 kg	17 kg
Gross weight	13.2 kg	19 kg	19 kg
Packaging dimensions	520 × 520 × 280 mm	700 × 600 × 200 mm	700 × 600 × 200 mm

R_t net weight


* repeatability is expressed as a standard deviation from 10 weighing cycles

** parameter determined in the following temperature range: +15 ÷ +35 °C

*** non-condensing conditions

In accordance with type approval, the balance parameters are maintained in temperature range: +15 ÷ +35 °C.

Dimensions

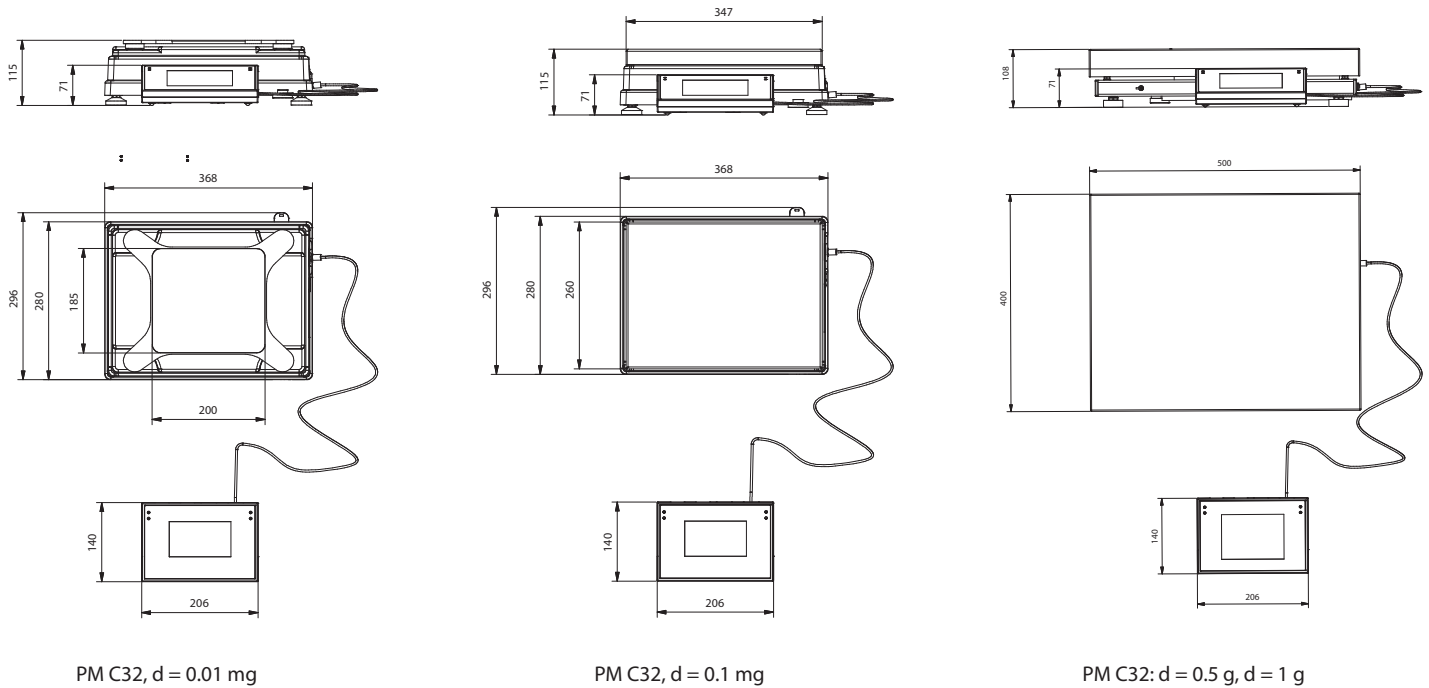

Accessories

Weighing Tables

- granite antivibration table
- antivibration tables for laboratory balances
- professional weighing table

Peripheral Devices

- Epson dot matrix printer
- barcode scanners
- WD-5/3Y LCD display
- WD-6 LCD display

Cables, Converters

- P0108: RS 232 cable (balance-computer)
- P0151: RS 232 cable (balance - Epson printer)
- AP2-1 power loop output

Electrical accessories

- ZR-02 power supply with battery

Dedicated Software

Alibi Reader

- readout of Alibi memory stored data
- export of Alibi memory stored data
- data filtering and reports generating
- saving Alibi database to CSV file

R-LAB

- collecting measurements
- carrying out statistical analysis of measurements
- customized graphs and reports

LabView Driver

- operation of RADWAG balances in LabView environment