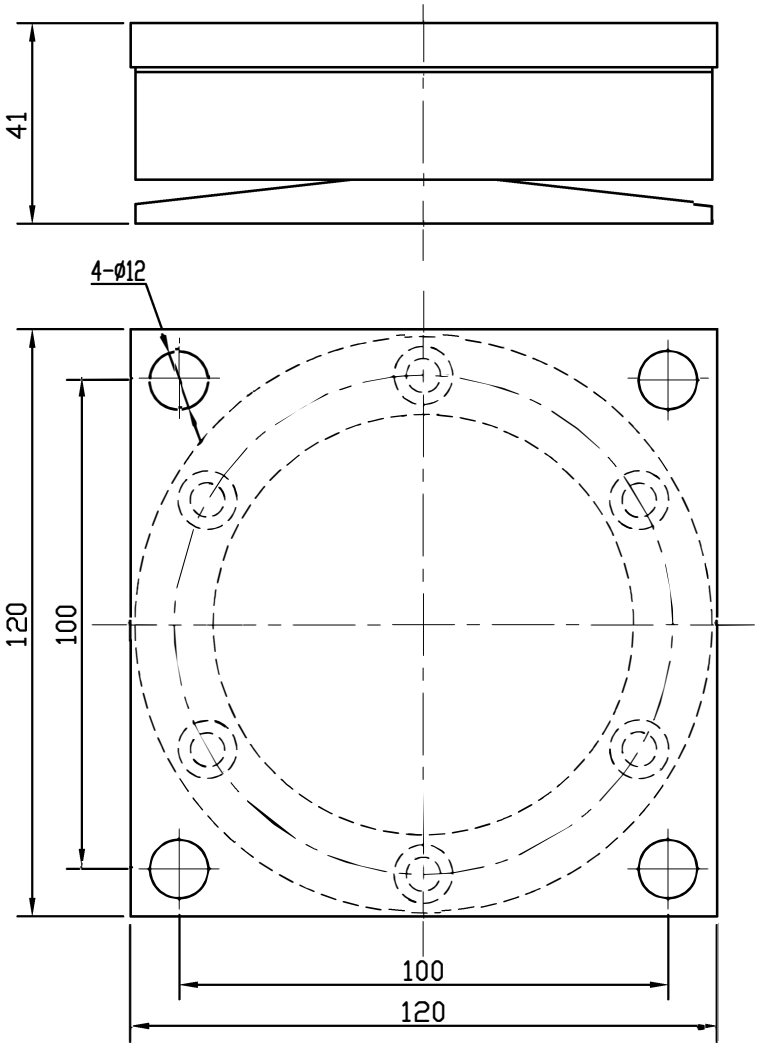

	Specifications	Technique
	Nomial load	0.5,1,2,3,5t
	Rated output	2mV/V
	Zero balance	±0.05mV/V
	Non-linearity	0.1%F.S.
	Hysteresis	0.1%F.S.
	Repeatability	0.05%F.S.
	Creep (30min)	0.05%F.S.
	Temp.effect on output	0.05%F.S./10℃
	Temp.effect on zero	0.03%F.S./10℃
	Input impedance	750±20Ω
	Output impedance	700±3Ω
	Insulation	≥5000MΩ/500VDC
	Recommended excitation	10V
	Maxmum excitation	15V
	Compensated temp range	-20 ~ 70℃
	Operation temp range	-20 ~ 70℃
	Safe overload	150%F.S.
	Ultimate overload	200%F.S.
	Cable size	ø5.4X3m(
	Protection class	IP67

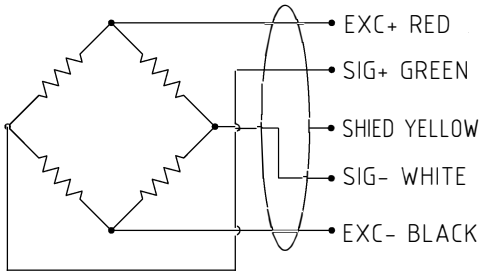

Drawing_GY-6_0,5-5ton_V1

0 ~ 6	±0.05	±0.10	±0.20	±0.50
>6 ~ 30	±0.10	±0.20	±0.50	±1.00
>30 ~ 120	±0.15	±0.30	±0.80	±1.50
>120 ~ 400	±0.20	±0.50	±1.20	±2.50
>400 ~ 1000	±0.30	±0.80	±2.00	±4.00
>1000 ~ 2000	±0.50	±1.20	±3.00	±6.00
>2000 ~ 6000	±1.00	±2.00	±4.00	±8.00

1:1 | A4

Patrik 2017.07.07

VETEK

kg

LGY65T200030-00-00