



OCS-G-SERIES CRANE SCALES 1 – 15 TON

Simple and effective Crane Scale for weighing hanging loads in steel water applications

FEATURES:


- CE approved
- 30mm LED display, LCD (optional)
- Gross/Net weight display convertible
- Weight accumulation function
- Auto shut off
- Remote control calibration
- HOLD function
- AC/DC power adaptor: output DC9V/1.5A
- Infrared remote controller, distance: 10m
- Alluminium shell

SPECIFICATIONS

Weight accuracy:	As OIML III standard.
Continuous working:	100 hours(LCD); 60 hours (LED)
Safe overload:	120%F.S. 120%F.S.
Operating temp:	-10°C ~ + 40°C
Operating humidity:	<= 90%R.H.

MINIMUM SAFE DISTANCE BETWEEN SCALE AND STEEL WATER

TEMPERATURE OF STEEL	WATER SAFE DISTANCE
1000°C	1200mm
1200°C	1500mm
1400°C	1800mm
1600°C	2000mm

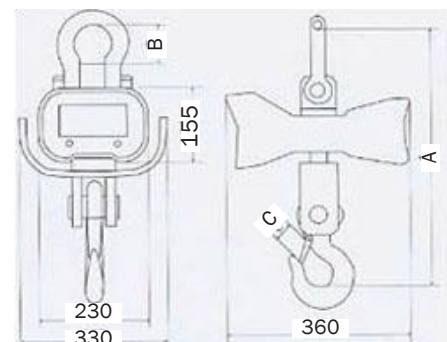

MODEL	CAPACITY	DIVISION	N.W. (kg)	A (mm)	B (mm)	C (mm)
OCS-G	1t	0.5kg	12	420	65	35
OCS-G	3t	1kg	14	600	80	45
OCS-G	5t	2kg	24	850	120	70
OCS-G	10t	5kg	65	900	140	70
OCS-G	15t	5kg	65	900	140	70