


BODY COMPOSITION ANALYZER

Instruction Manual

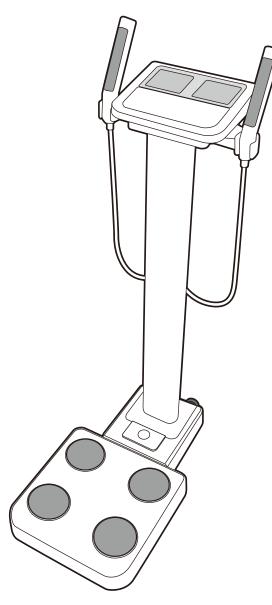

<Usage Conditions>

Temperature	: 5°C – 35°C
Relative Humidity	: 30% – 80%
Maximum Altitude Pressure	(without condensation) : 2,000m ASL : 86kPa - 106kPa

<Storage Conditions>

Temperature : -10°C – 50°C		
RelativeHumidity : 10% – 90% (without condensation)		
To avoid malfunctions, avoid storing the equipment in a place with direct sunlight,		
significant temperature changes, a risk of dampness, a large amount of dust or a		
risk of vibration or impact, or in the vicinity of flames.		



Please read this Instruction Manual carefully and keep it for future reference.

Intended Use

- •This equipment can be used in the screening of certain adult diseases and conditions related to body weight and composition.
- •The equipment can be used in the monitoring and prevention of conditions caused by excessive deposits of fatty tissue such as diabetes, hyperlipidemia, cholelithiasis (gallstones) and fatty liver.
- The equipment can be used in the monitoring of changes in individuals' body composition related to the ratio of fatty tissue to lean tissue.
- •The equipment can be used to assess the effectiveness of individuals' nutrition and exercise programmes for health and physical fitness.

Efficacy

- 1. This product is simple to use, and requires no specialized facilities or expertise is required to take measurements.
- 2. Measurements can be taken quickly and easily, causing minimal inconvenience to the patient during measurement.



Contents

Before Use

For Your Safety	4
Part Names & Connection	
Preparation	10
Power Supply	····· 1 4
Settings ······	15

How to Use

•	Taking a Measurement ·····17
	Body Composition Mode ······17
	Measurement Results ······19
	Scale Mode ······21
	Weight Lock Mode ······22
	Output and Storage of Measurement Results23

If Necessary

Troubleshooting	25
Specifications	26


For Your Safety

GB

This section explains precautionary measures to be taken to avoid injury to the users of this device and others, and to prevent damage to property. Please familiarise yourself with this information to ensure safe operation of this equipment.

Warning	Failure to follow instructions highlighted with this mark could result in death or severe injury.
A Caution	Failure to follow instructions highlighted with this mark could result in injury or damage to property.
\bigcirc	his mark indicates actions that are prohibited.
0	This mark indicates instructions that must always be followed.

Marning

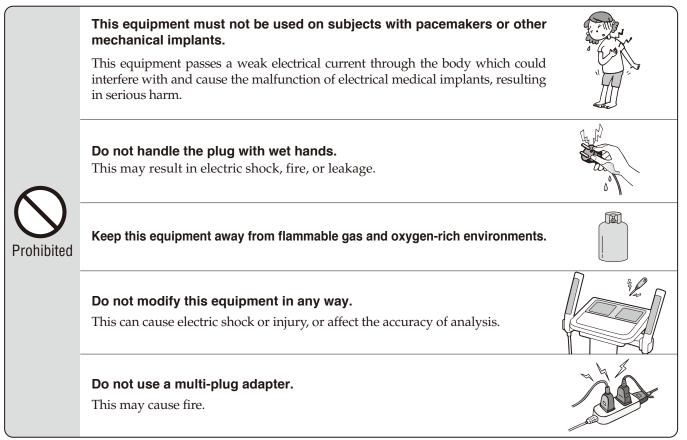

(GB)

ACaution

Keep away from water.

Avoid using on subjects with metal allergies. Allergic reactions may be caused by the stainless steel used in the electrodes of this device.

Do not jump on the equipment.

Do not lean on the equipment.

Do not use this equipment near other products that emit electromagnetic waves.

 (\mathbf{n})

Do not insert fingers into gaps or holes.

Prohibited **Do not apply force to the display.**

The screen panel may break and cause injury.

Do not place items sensitive to magnetic forces near the equipment.

The magnet of the impedance meter may cause corruption of data on devices such as floppy disks and USB memory sticks if these are placed near the equipment.

Assist persons with disabilities.

Another person must perform measurements for persons with disabilities that impair their ability to do so alone.

	Be sure to clean the scale platform with appropriate disinfectant after each use.		
	Stand clear of the subject during measurement to avoid electric shock and ensure accuracy.		
	Continually monitor both the subject and the equipment for anomalies.		
	If an anomaly in the subject or equipment is discovered, take appropriate action, such as stopping the equipment, while ensuring the safety of the subject.		
	Be sure to use the included AC adapter. (TR30M120)		
	Do not lean against the equipment.		
	Unplug the AC cable from the equipment when moving it.		
Always	Tighten the adjustable feet when moving the equipment.		
Always	Interpretation of analysis results (e.g. evaluation of measurements and formulation of exercise programmes based on results) must be performed by a professional.		
	Weight loss measures and exercise based on self-analysis could be detrimental to you health. Always follow the advice of a qualified professional.		
	This equipment is designated a Class B IT device (mainly for systems intended to be used in domestic environments) and is CE (EMC) certified, but it may affect devices that are sensitive to electromagnetic waves.		
	If connecting a computer or peripheral devices to this equipment, please use devices complying with IEC60601-1 (EN60601-1). Power must be supplied from a medical isolation transformer for IEC60950(EN60950) devices. Keep a distance of 1.5m between units during operation. Failure to do so may cause electric shock to subjects or malfunction.		

(GB)

For Accurate Measurements

Avoid measuring after strenuous exercise.

This may cause inaccurate measurements. Please take measurements after sufficient rest.

Avoid measuring after excessive food or fluid intake or when dehydrated.

This may cause inaccurate measurements. For greater accuracy, avoid using directly after waking up. Use at the same time on each occasion, at least three hours after a meal.

Ensure that your arms are not touching your sides and that your inner thighs are not touching each other during measurement. If necessary, place a dry towel between your arm and side and/or between your thighs.

Do not take measurements while using transmitting devices, such as mobile phones, which may affect readings.

Use the equipment under the same conditions and in the same position as much as possible for accurate tracking of changes.

Readings are greatly affected by the level of hydration and position of the body. Please use at the same time of day each time, under the same conditions and in the same body position.

Avoid measuring in multiple locations with greatly differing temperatures.

This may cause inaccurate measurements. Allow the equipment to stand for at least 2 hours before using if it is moved to a new location with a temperature difference of 20°C or more.

Make sure the soles of your feet are free of excess dirt, as this may block the mild electric current.

Always hold both arms straight down when taking measurements to prevent measurement errors such as undermeasurement of body fat.

Bare feet should be placed correctly on the electrode platform. Place arms straight down during measurement.

Use in a stable location.

Errors in measurements may occur if the device is used in an unstable location.









GB

Scheduled Maintenance

TANITA recommends that each facility conduct periodic checks of each unit.


1. Check the following at least daily:

- That the unit is on a stable and level surface
- Date and time settings
- 2. Visually inspect the following at least weekly:
 - The display for any damage or contamination
 - All cables, cords, and connector ends for damage or contamination
 - All safety-related labeling for legibility
 - All accessories (sensors, electrodes, etc.) for wear or damage
- 3. Visually inspect the following at least monthly:
 - Mounting screws on stand

Update settings, replace items, or call for service as necessary according to the results of the visual inspections. Do not use the unit if you see any signs of damage. Equipment that has been damaged must be checked for proper operation by qualified personnel before using again.

Part names & Connection procedure


Symbols and their Meanings

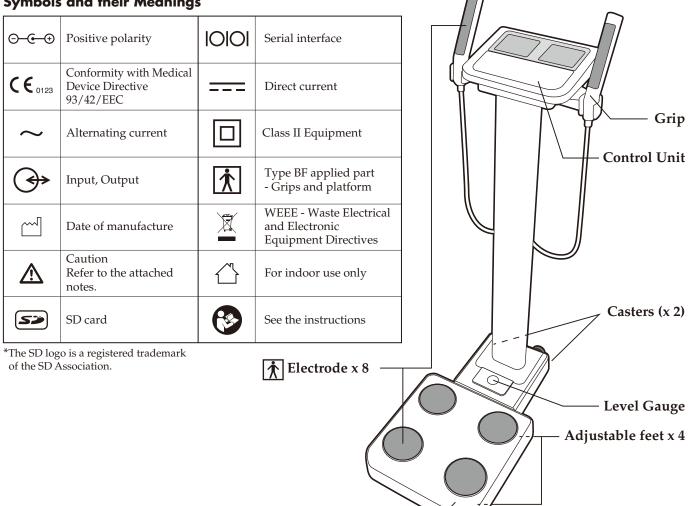

Checking the level


Platform

- * For accurate measurement, place the machine as level as possible.
- * Rotate the adjustable feet in 4 positions for adjustment so that the bubbles of the level gauge reach the centre.




Status when the level gauge is viewed from above

Control unit Connection of Plugs

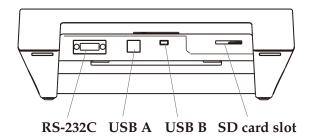


Platform Connection of Plugs

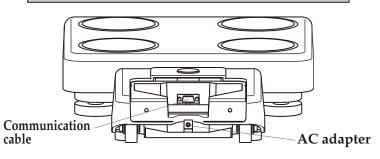

Before Use (cautions for safety)

(GB)

Display and Keys

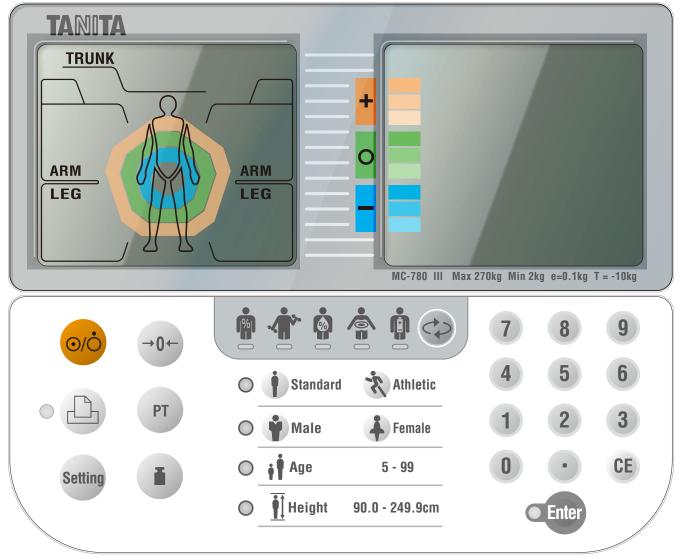

Meanings of the LED Indicators and Keys

0/0	Turn ON / OFF the power	
•	Printout result	
Setting	Set various functions	
→0←	Reset zero point	
РТ	Set preset value (Clothes weight)	
I	Select measurement mode	


		Display Body Fat (percentage and mass) *Not measured value but calculated value			
		1 2	Display Body Muscle (percentage and mass) *Not measured value but calculated value		
		Display Body Water (percentage and mass) *Not measured value but calculated value			
		Display Visceral Fat Rating		İ	Display Basal Metabolic Rate
•	• Standard	Athletic	Indicates whether "Standard mode or Athletic mode" is selected as the body type.		
•	Male Male	Female	Indicates whether "Male or Female" is selected as the gender		
•	🛉 🛉 Age	5 - 99	Enter the age between "5 - 99 years"		
•	🚺 Height	90.0 - 249.9cm	249.9cm Enter the height between "90.0 - 249.9 cm"		
Enter Confirms the entered numerical value.					


GB

Preparation (Setting up the main unit)

GB

Before Use (cautions for safety)

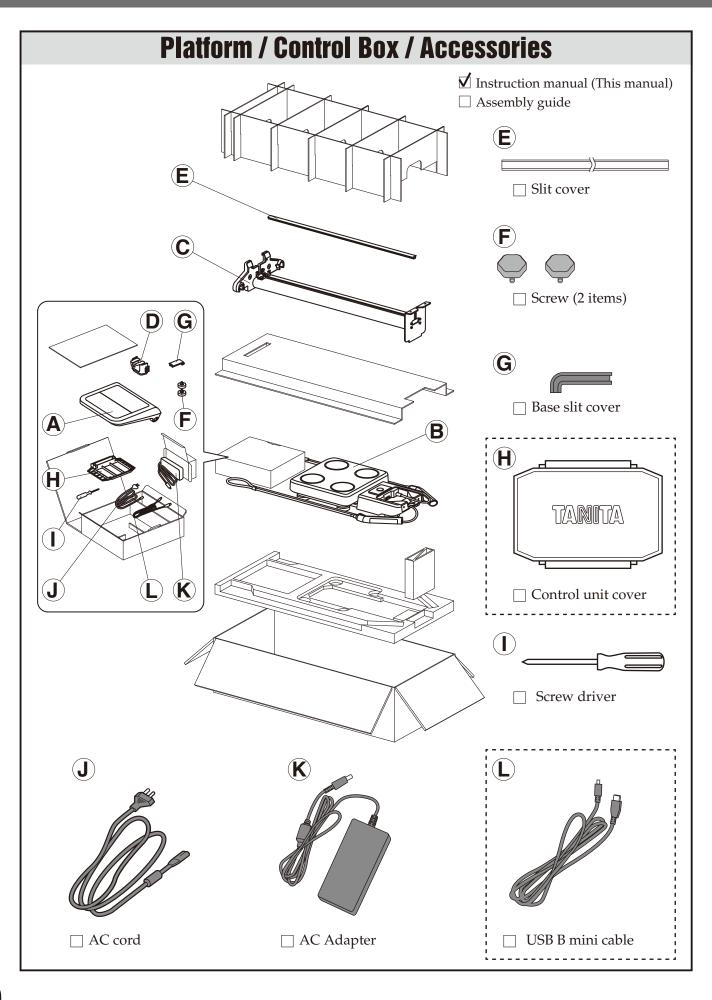


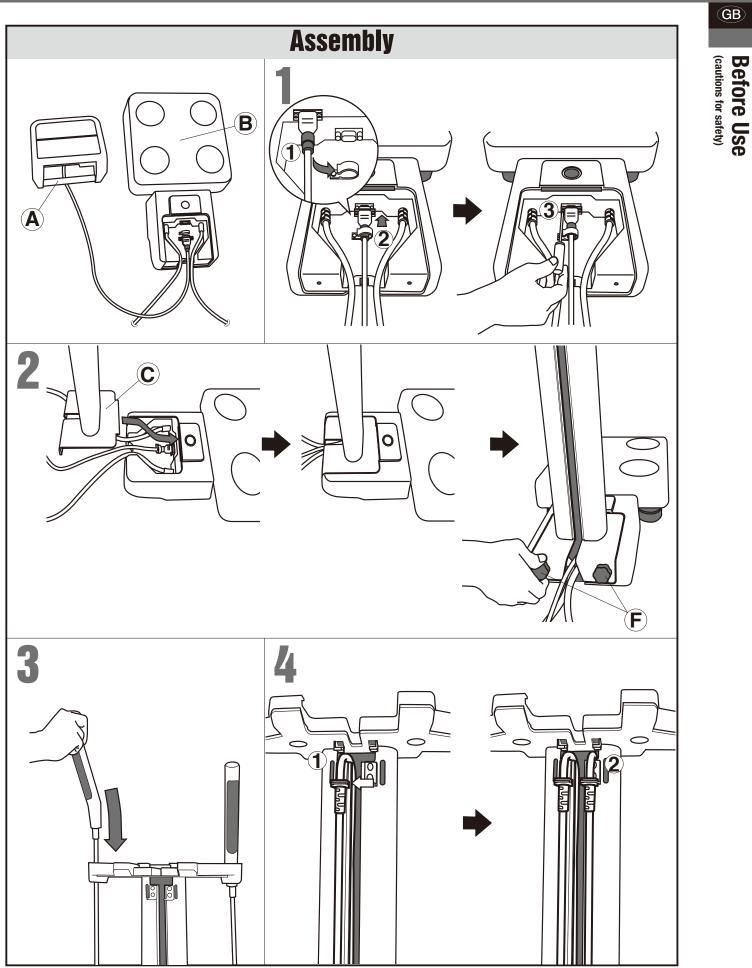


Preparation Setting up the mainunit

GB

Before Use (cautions for safety)

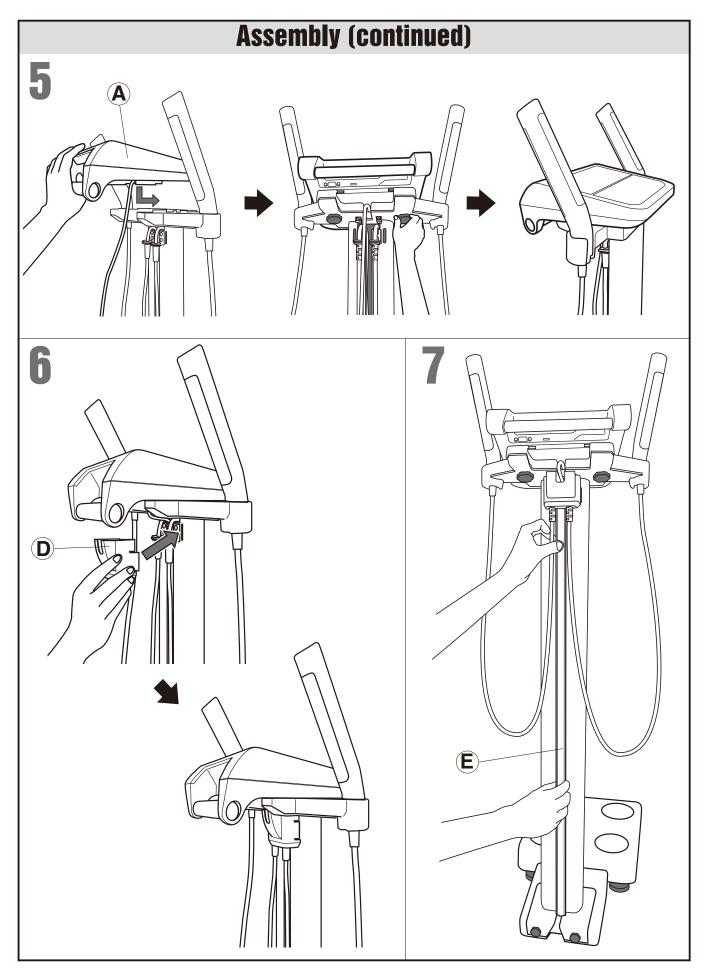

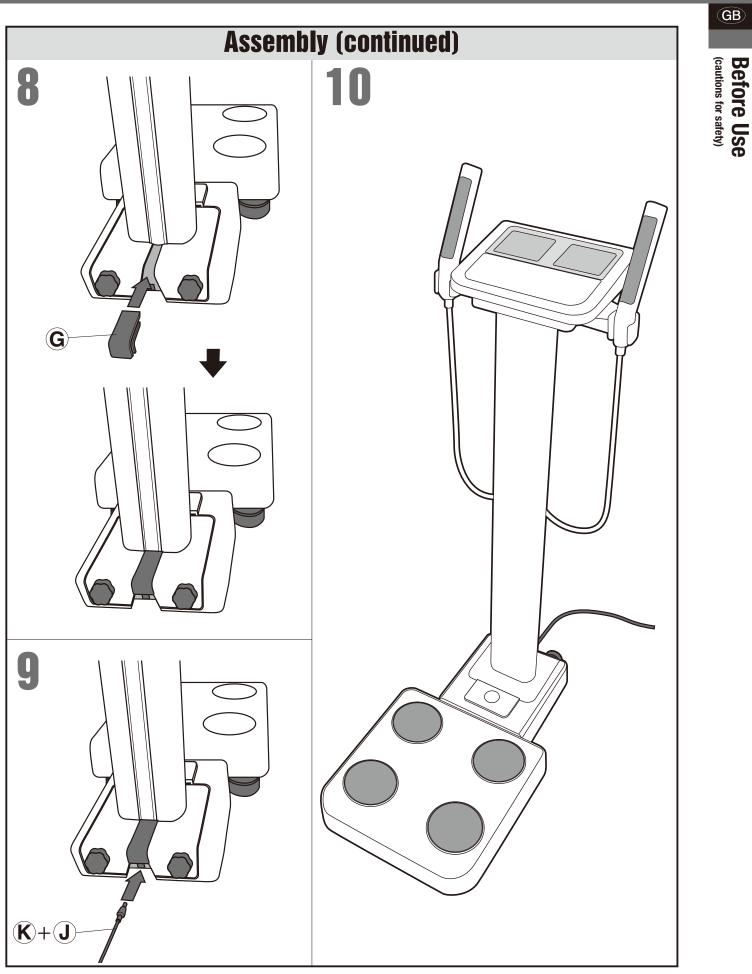

Power Supply


Before Use (cautions for safety)

Turning the main power ON/OFF

Turning the main power ON.


Press the oo key to turn on the power.

The initial screen is displayed.

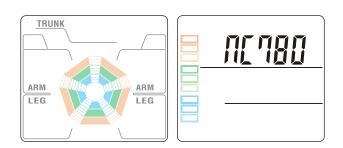


Turning the main power OFF. Press the oo key to turn the

power off.

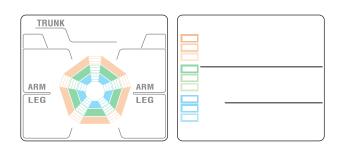

Emergency Shut Down

Keep the area around the plug socket clear during operation of the equipment in case of an emergency.



Settings



SEŁ

Press the setting key to change the mode.

The setting screen is displayed.

Note

• The setting key cannot be used when the scale is measuring weight or impedance.

Select the setting item from the list below. Enter numerical values and Press the **CEnter** key.

Setting item List CEnter	→ S
---------------------------------	-----

Save changes and return \rightarrow Return without saving

			8
0	Check the software version	10	Height input unit
1	Date and time		(0: 0.1cm increments 1: 1cm increments)
	* Date and time → Note	11	Automatic determination time of input information
2	Number to be printed automatically (Body composition mode) (0-2 sheet(s))		(0-9 second(s)) * 0: Disables this function
3	Number to be printed automatically (Scale mode and Weight lock mode)	18	Target body fat ratio input (0: off 1: on)
	(0-2 sheet(s))	19	Printout language
4	Select printing paper (0: Pre printed paper 1: Plain paper)		(1: English, 2: French, 3: German, 4: Italian, 5: Spanish)
5	Beep sound (0: off 1: on)		Adjudt printing position (2: \downarrow , 4: \leftarrow , 6: \rightarrow , 8: \uparrow)
6	ID number (Manual input) (0: off 1: on)		Timeout function of result display (0: disable 1: enable)
7	ID number (Automatic count up) (0: off 1: on)		Data output format to PC (0: default format 1: BC-418 format)
8	 8 Measurement flow (0: Two step flow (Measure body weight first) 1: One step flow (Enter personal information first) * Measurement flow → P.17 9 Body type selection (Athletic mode) (0: off 1: on) * Athletic mode → P.24 		Display direction (0: default 1: reversal position)
			BMI desirable range
9			(0: 18.5 to 25 1: 18.5 to 23)
			Reading mesurement result

Note

Enter the year, month, day, hour and minute. The date format is "yyyy mm dd hh:mm"

Example 6:47 pm, 24th September, 2012 "2012" "09 24" "18:47" To enter a number with 1 digit (0 – 9), press "0" first.



Settings (continued)

(cautions for safety) Before


Use

Select the Measurement Mode

Select the measurement mode by pressing the **I** key.


The measurement mode is switched in the following order when the

key is pressed:

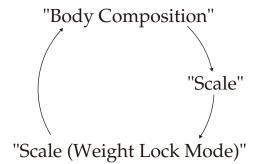


The "**I** " mark is displayed when the scale mode is selected.

Body Composition Mode TANITA TRUNK ÷ 0 ARM ARM LEG lkg Min 2kg e=0.1kg T = -10k 🛉 🕂 🏟 🛉 🕡 🚓 7 8 9 →0← 5 6 4 * Athletic 🔿 👔 Standard o B 2 3 🔿 🛉 Male 🗼 Female 5 - 99 •

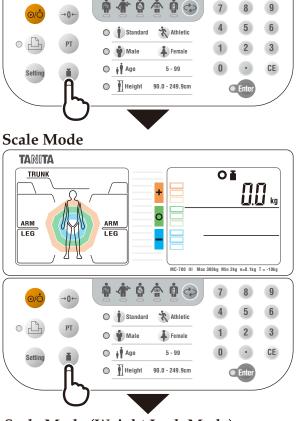

Scale Mode (Weight Lock Mode)

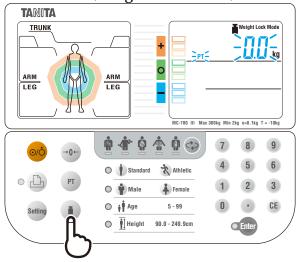


Taking a Measurement

Body Composition Mode

Enter the preset tare value (clothes weight)


Turn the power on, and check that the "**PT**" mark is displayed. Enter the preset tare value (clothes weight) The tare value range is 0.0 - 10.0kg

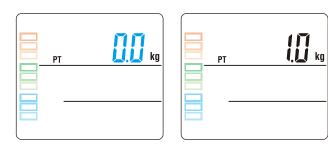



Measure body weight





Wait until "STEP ON" flashes.

"NET" is displayed when you have entered a tare value (clothes weight).

Note

If the scale does not detect a load, press **PT** to switch to "Input tare value".

🖹 Athletic

If the scale detects the load, press **PT** to display the entered tare value.



Enter ID number

If the ID number function is set to OFF, the scale switches directly to "Select body type" without requesting an ID number.

The ID number range : 0 - 999999999999999999



Select body type 🕺 Standard

If the body type selection (Athletic mode) is set to OFF, the scale switches directly to "Select gender" without requesting a body type.

The "*****" mark is displayed when the Athletic mode is selected.



ID

How to Use (cautions for safety)

(GB)


Note Athletic Mode \rightarrow P.24

Taking a Measurement (continued)

How to Use (cautions for safety)

Body Composition Mode A Male Select gender Female Ŷŧ ID **65**] kg Enter age 🕴 Age Ÿ ID **65]** kg 🛉 🙆 🛉 🖓 5 6 Athletic O 🚺 Standard 3 O 🛉 Male 👗 Female CE O 🕴 Age 5 - 99 O 👖 Height 90.0 - 249.9cm The age range : 5 - 99 Height **Enter height** Ŷ ID **À Ì ¢** 9

The height range : 90.0 - 249.9 cm



10 653 kg

Set target body fat ratio

If the target body fat ratio function is set to OFF, the scale switches directly to "Measuring impedance" without entering the target value.

The body fat ratio range : 4 - 55 %

Note Target Body Fat → P.24



9

Measuring body composition

The scale starts measuring impedance after you have entered all of the personal information.


The segmental impedance values are measured in order.

The scale displays the measurement results after measuring the whole body impedance and segmental impedance.



Measurement Results (Body Composition Mode)

Output Measurement Results (Body Composition Mode)

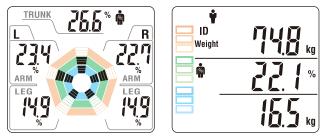

Body fat mass (kg)

The measurement results are displayed on the LCD after measurement is completed. The results are output to the PC immediately after measurement is completed.


Press the \bigcirc key to select the measurement display.

The measurement display is switched in the following order by pressing the 🗘 key. "Fat" → "Muscle" → "Body Water" → "Visceral fat rating" → "Basal metabolic rate" → "BMI"

Fat Fat mark TRUNK 26.6 Segmental fat % ID R **└ └ └ └** _ _ _ kg Body weight (kg) Weight Å Body fat % H9

Evaluation of your results compared to average values.

Muscle

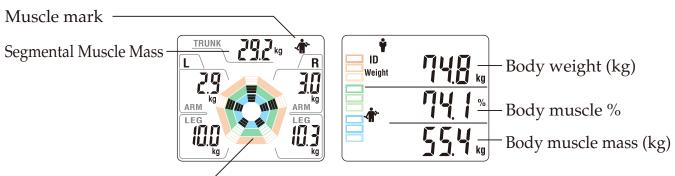


Evaluation of your results compared to average values. (cautions for safety) How to Use

Taking a Measurement (continued)



How to Use (cautions for safety)

Measurement Results (Body Composition Mode) **Body water** Ŷ ID Body weight (kg) Weight kg Γ Π % Body water % ø Body water (kg) Body water mark **Wisceral fat rating** Ŷ ID Body weight (kg) Weight kq η Visceral fat rating \$ VFR mark **i** Basal metabolic rate Ŷ ID H Body weight (kg) Weight kg kJ BMR (kJ) kca BMR (kcal) ø BMR mark **BMI** Ŷ

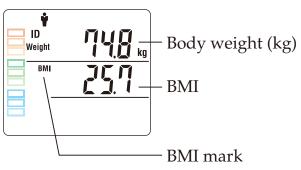

(GB)

Scale Mode

The "**I**" mark is displayed when the scale mode is selected.

Enter the ID number

If the ID number function is set to OFF, the scale starts measuring your weight immediately.

Enter the ID number. The ID number range is from 0 to 99999999999999999.

Press **PT** to enter tare value (clothes weight). The tare value range is 0.0 - 10.0kg.

Measure body weight


Wait until "**STEP ON**" flashes.

"NET" is displayed when you have entered a tare value (clothes weight).

The "Stabilised" mark (**O**) appears when the load is stable. The "Stabilised" mark (**O**) disappears when the load is unstable.

When the load is stable, the measurement results are output via the USB port and stored on an SD card.





Taking a Measurement (continued)

Weight Lock Mode

The "**I**" mark and "Weight Lock Mode" are displayed when the weight lock mode is selected.

Enter the preset tare value (clothes weight)


The "**PT**" is displayed after the scale mode is selected. Enter the preset tare value (clothes weight)

The tare value range is 0.0 - 10.0kg.



If the ID number function is set to OFF, the scale starts measuring your weight immediately.

Enter the ID number. The ID number range is from 0 to 99999999999999999.

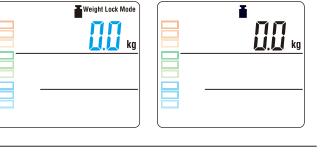



Measure body weight



* "NET" is displayed when you have entered a tare value (clothes weight).



Output and Storage of Measurement Results

Data Output

Outputting measurement results via the USB port

The results are output to the PC immediately after measurement is completed.

Data is output in CSV format.

Data Storage

Data storage of measurement results

The results are saved to the SD card immediately after measurement is completed.

The *mark* is displayed when a valid SD card is installed.

A new file is created on the SD card for each day.

The file is created using the measurement date and time as the file name, as shown below. "YYYYMMDD" (year, month and date)

If "error 12" is shown in the display, this indicates that there is not enough free space left on the SD card.

You can store approximately 10,000 measurement results (weight only mode) on a 2GB SD card.


- Do not remove the SD card when it is storing or reading data.
- Do not turn off the main power when the SD card is storing or reading data.


Printing Data

Printing Measurement Results

The results are printed from the printer immediately after measurement is completed. The number of sheets that are printed is set in Setting .

Press the \bigcirc key to print additional copies. You can print out the result if \bigcirc \bigcirc is lighted.

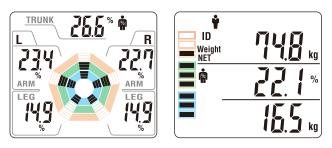

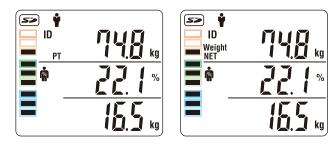

GB

Output and Storage of Measurement Results (continued)


How to use (cautions for safety)

Reading stored measurement result data

Loading, displaying and printing stored measurement result data

Select the file that you want to load using the key, and press Enter.

You can also use the number key pad to enter the file name.

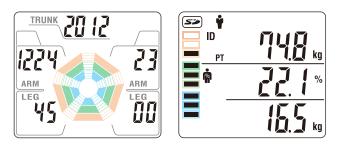

The selected file is displayed on the right side of the LCD. The file name is displayed as shown below: Top of the LCD: "yyyy". Centre of the LCD: "mm dd".

General Instructions for Body Composition Measurement

Athletic Mode

- •Recommended for those who are 18 years or older and meet the following conditions.
- People who carry out 12 hours or more of cardiovascular exercise a week.
- People who belong to a sport team or a sport organization with the aim of participation in competition, etc.
- People who are professional athletes.

Target Body Fat

•Before you start a weight management program and set the appropriate personal body fat %, please consult your doctor. Tanita is not responsible for setting the appropriate target body fat % for specific individuals.

Attention


- Posture when measuring
- Stand with both feet parallel on the electrodes.
- Stand without bending knees.
- The age input range is 5 99 years old. Input age 99 for those who are 100 years or older.

Note

- •Inaccurate results may be reported after excessive food/fluid intake, or after periods of intense exercise.
- If clothes weight is input, clothes weight is subtracted from the weight measurements.

Troubleshooting

Please check the following before requesting repair.

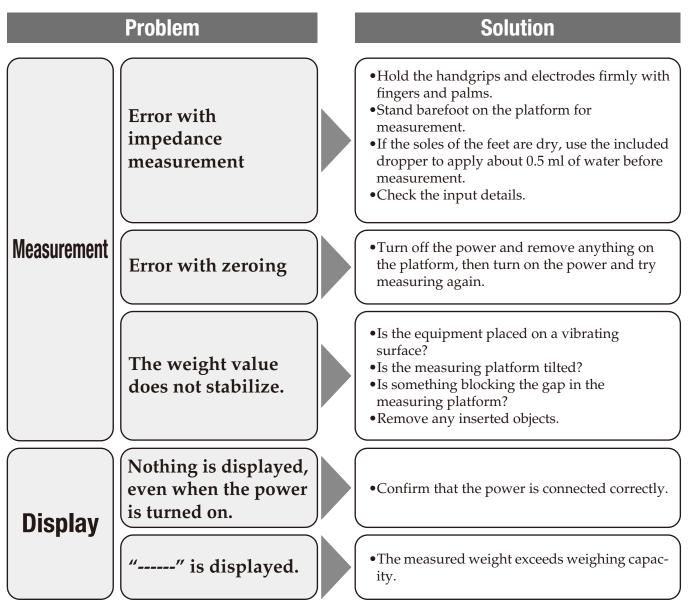

(GB)

25

Specifications

	Model Number	MC-780MA	
Accuracy Grade		MDD: CLASS IIa	
		NAWI: CLASS III	
	Power Source	100 - 240V AC	
Elec	tric Current Range	18VA	
	Measurement System	Multi-Frequency 8 Electrode	
	Measurement Frequency	5kHz/50kHz/250kHz	
Immedance	Measurement Current	Up to 90µA	
Impedance Measurement	Electrode Materials	Feet: Stainless steel/Handgrips: plated	
พเธอรินาธิการกา	Measurement Part	Whole body/Right arm/Left arm/Right leg/Left leg	
	Measurement Range	75.0Ω - 1,500.0Ω (0.1Ωincrements)	
	Accuracy at First Calibration	± 2%	
	Measurement System	Strain Gauge Load Cell	
Weight	Maximum Capacity	270kg (including preset tare value)	
Measurement	Minimum Graduation	0.1kg	
	Accuracy at First Calibration		
	Display	Dual LCD screen	
		USB B-type connector (device)	
	Interface	RS-232C	
		USB mini-B (for PictBridge printer)	
		SD card*4	
Usage	Temperature	5°C – 35°C	
Conditions	Relative humidity	30% - 80% (without condensation)	
F	Product Weight	15.5kg	
Product Size	Platform	Platform size: 360mm x 360mm Height: 94mm	
110000010120	Product Height	1165mm	

If Necessary (cautions for safety)

	Clothes We	iaht	0 - 10.0kg (0.1kg increments)
Input items	Serial No.		Up to 16 digits
	Gender		Female/Male
	Body Type		Standard/Athletic*1
	Age		5 - 99 years
	Height		90.0 - 249.9cm (0.1cm increments)
	Target Body fat %		4 - 55% (1% increments)
Output items	ID		16 digits
	Gender		Female/Male
	Body Type		Standard/Athletic *1
	Age		5 - 99 years
	Height		90.0 - 249.9cm (0.1cm increments)
	Clothes Weight		0kg - 10.0kg (0.1kg increments)
	Whole Body Analysis	Weight	0kg - 270.0kg (0.1kg increments)
		Fat %	1.0% - 75.0% (0.1% increments)
		Fat Mass* ³	(0.1kg increments)
		FFM* ³	(0.1kg increments)
		Muscle Mass* ³	(0.1kg increments)
		BMI	(0.1 increments)
		Bone Mass*2*3	(0.1kg increments)
		Metabolic Age* ²	
		Basal Metabolic Rate*2	(1kcal/1kJ increments)
		Visceral Fat Rating* ²	1 - 55 (1 increments)
		TBW* ³	(0.1kg increments)
		TBW %	(0.1% increments)
		ECW* ²	(0.1kg increments)
		ICW ^{*2}	(0.1kg increments)
		ECW / TBW*2	(0.1% increments)
	Segmental Analysis	Muscle Mass* ³	(0.1kg increments)
		Muscle Mass Rating*2	-4 - +4 (1 increments)
		Fat %	(0.1% increments)
		Fat Mass* ³	(0.1kg increments)
		Fat Rating*2	-4 - +4 (1 increments)
	Body	Physique Rating* ²	
	Balance	Muscle Mass Balance* ²	
	Evaluation	Leg Muscle Score*2	
	Others	Bioelectrical data	Reactance/Resistance/Phase Angle

*1 Athletic mode can be selected only for ages 18-99.

*2 18-99 years *3 Calculated value

*4 Compatible with SD and SDHC memory cards

Note

Not compatible with SDXC memory cards

GB

Disposal



This equipment is an electronic device. Please therefore dispose of it as an electronic device instead of as general household waste. Please follow regional regulations for disposal.

$\mathbf{C} \in \begin{bmatrix} 0122 & \text{Thi} \\ 0123 & \frac{1}{2} \\ 1 \end{bmatrix}$

1. Non-Automatic Weighing Instruments (2009/23/EC)
2. Medical Device Directive (93/42/EEC)
3. RoHS Directive (2011/65/EU)

0122 This product meets the following requirements ;

<EU representative> TANITA Europe B.V.

Hoogoorddreef 56-E, 1101 BE Amsterdam, The Netherlands Tel: +31-20-560-2970 Fax: +31-20-560-2988 http://www.tanita.eu

<Manufacturer> TANITA Corporation

1-14-2, Maeno-cho, Itabashi-ku, Tokyo, Japan Tel: +81 (0) 3-3968-7048 Fax: +81 (0) 3-3967-3766 http://www.tanita.co.jp

TANITA Corporation of America, Inc.

2625 South Clearbrook Drive, Arlington Heights, Illinois 60005, U.S.A. Tel : +1-847-640-9241 Fax: +1-847-640-9261 http://www.tanita.com

TANITA India Private Limited

A-502, Mittal Commercia, Off. M. V. Road (Andheri Kurla Road), Marol, Andheri-East, Mumbai 400 059 INDIA Tel : +91-22-3192-6107 Fax: +91-22-2859-9143 www.tanita.co.in

TANITA Health Equipment H.K.LTD.

Unit 301-303,Wing On Plaza, 3/F., 62 Mody Rord, Tsimshatsui East, Kowloon, Hong Kong Tel : +852-2834-3917 Fax: +852-2838-8667 www.tanita.asia

TANITA (Shanghai) Trading Co., Ltd.

Room 8005, 877 Huai Hai Zhong Lu, Shanghai, People's Republic of China Tel : +86-21-6474-6803 Fax: +86-21-6474-7901 www.tanita.com.cn