

## SBK

SBK SERIES IP68 STAINLESS STEEL SHEAR BEAM LOAD CELLS, 350 Ohm



Stainless steel shear beam load cells suitable for building, for example, CE-M approved scales with 4 load cells or for weighing tanks and hoppers with the relevant accessories.

---

CAPACITIES (kg): 300, 500, 1000, 2000.

---

OIML R60. C3 precision class.

---

Stainless steel. IP68 protection.

---

Working in cooperation with:

**Vetek AB**

Hantverkavägen 15 - 76493 Vaddö, Sweden  
Tel +46176208920 [info@vetek.com](mailto:info@vetek.com)

The best solution  
for advanced industrial  
applications

## MAIN FEATURES

- C3 PRECISION CLASS
- STAINLESS STEEL CONSTRUCTION
- IP68 PROTECTION
- MAX. CAPACITIES FROM 300 TO 2000 kg
- SHIELDED CONNECTION CABLE
- OIML CERTIFICATE AVAILABLE UPON REQUEST
- TEST CERTIFICATE AVAILABLE UPON REQUEST


## TECHNICAL FEATURES

- Minimum load cell verification interval:  $V_{min} = E_{Max} / 10.000$
- Maximum number of verification intervals:  $n_{LC} = 3000$
- Combined error: 0,017% of Full Scale Output (F.S.)
- Full Scale Output: 2mV/V +/- 0.1%
- Temperature effect on zero: 0,0014% /°C
- Temperature effect on full scale output: 0,0014% /°C
- Compensated Temperature Range: -10°C/+40°C
- Operating Temperature Range: -20°C/+60°C
- Creep error after 30 minutes: 0,024% F.S.
- Maximum tolerated excitation voltage: 15 VDC
- Input Resistance:  $385 \pm 20$  Ohm
- Output Resistance:  $350 \pm 5$  Ohm
- Insulation Resistance: >5000 MOhm
- Safe Overload: 150% F.S.
- Ultimate Overload: 200% F.S.
- 6-wire shielded cable, 5m long, 5 mm diameter

## ATEX VERSION

- The CCATEX certificate makes the load cell suitable for use in hazardous areas with protection methods according to:  
ATEX II 1G Ex ia IIC T6 (Ta -20÷+40°C) TX (Ta -20÷+65°C) Ga  
ATEX II 1D Ex ta IIIC TX°C (Ta -20÷+40°C) TX°C (Ta -20÷+65°C) Da IP65.  
The certificate includes the manual and the ATEX CE conformity declaration (available in EN, DE, FR, and IT).
- IMPORTANT: the certificate refers to the single load cell. For systems with more load cells, it is necessary to order one certificate for each load cell.

DETAIL 1

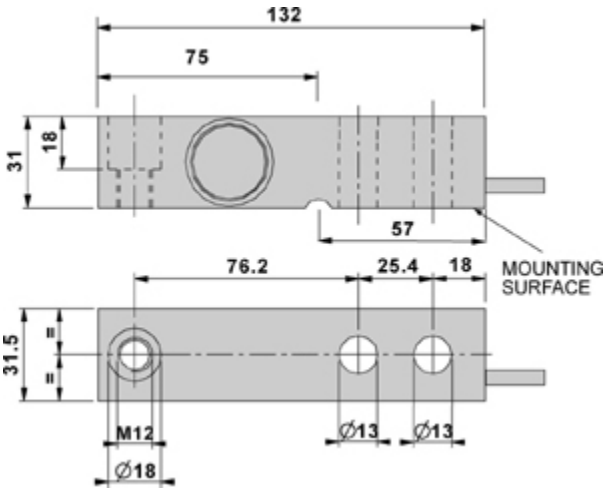

Dimensions (mm)

| Wiring Code |          |
|-------------|----------|
| Colour      | Function |
| --          | SHIELD   |
| YELLOW      | OUTPUT + |
| GREY        | SENSE +  |
| BROWN       | INPUT +  |
| WHITE       | OUTPUT - |
| GREEN       | INPUT -  |
| PINK        | SENSE -  |

VERSIONS

Versioni disponibili

| Codice                                                                                      | Max (kg) |
|---------------------------------------------------------------------------------------------|----------|
| SBK300   | 300      |
| SBK500   | 500      |
| SBK1000  | 1000     |
| SBK2000  | 2000     |



[www.diniargeo.com](http://www.diniargeo.com)



**DINI AR GEO**  
**FRANCE** sarl  
Nogent-sur-Marne

**DINI AR GEO**  
**GMBH**  
Sinsheim - Germany

**DINI AR GEO**  
**UK Ltd**  
Taunton - United Kingdom

**DINI AR GEO WEIGHING**  
**INSTRUMENTS Ltd**  
Shanghai - China

**DINI AR GEO**  
**WEIGHBRIDGES**  
Calto (RO) - Italy



**HEAD OFFICE**  
Via Della Fisica, 20  
41042 Spezzano di Fiorano Modena - Italy



### **Vetek AB**

Hantverkarsvägen 15 - 76493 Vaddö, Sweden

Tel +46176208920 [info@vetek.com](mailto:info@vetek.com)

**SALES AND TECHNICAL ASSISTANCE SERVICE**