




C8S DYNAMOMETER: 5 – 1000 KN

FEATURES

- Low profile dynamometer
- Completely LASER welded
- High long term stability
- For dynamic applications

CE EN 10002-3 | ISO 376 | ASTM E74
SIT Certificate on request

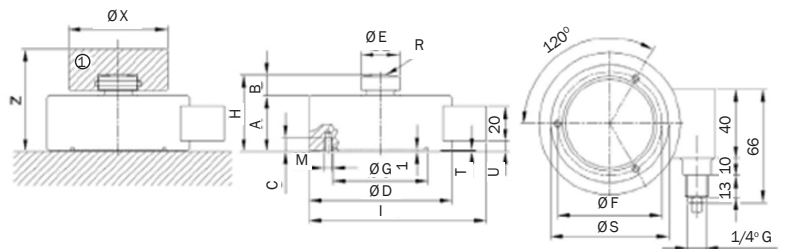

C8S:	CODE:		ACCESSORIES (optional):	Z	Ø X
5,10,25,50,75,100 kN	CTIC22	①	Loading head.	59	57
200,300 kN	CTIC35	①	Loading head.	82	76
500,750,1000 kN	CTIC60	①	Loading head.	106	126

DIMENSIONS (mm)

CODE (Class 0.5)	CODE (Class 1)	LOAD	A	B	C	Ø D	Ø E	Ø F	Ø G	H	I	M	n°M	R	S	T	U
CC8S825KNI05	CC8S825KNI15	5kN															
CC8S8210KNI05	CC8S8210KNI15	10kN															
CC8S8225KNI05	CC8S8225KNI15	25kN	32	12	10	82	22	68	54	44	102	M8	3	50	60	0,3	6
CC8S8250KNI05	CC8S8250KNI15	50kN															
CC8S8275KNI05	CC8S8275KNI15	75kN															
CC8S82100KNI05	CC8S82100KNI15	100kN															
CC8S126200KNI05	CC8S126200KNI15	200kN	50	14	12	126	35	90	79	64	148	M8	3	160	100	0,5	15
CC8S126300KNI05	CC8S126300KNI15	300kN															
CC8S165500KNI05	CC8S165500KNI15	500kN															
CC8S165750KNI05	CC8S165750KNI15	750kN	60	20	20	165	60	130	94	80	188	M16	4	300	115	1	17
CC8S1651MNI05	CC8S1651MNI15	1000kN															