




Wireless Tension Link 110ES-WL



**The revolutionary
concept to influence
the industry!**

www.vetek.com

Built to Last and for Accuracy

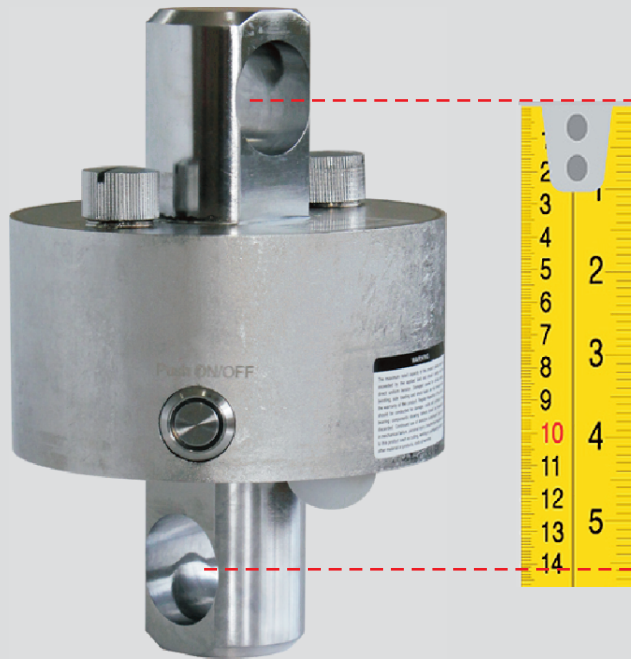

ANYLOAD wireless 10t crane scale

- ? Scientifically calculated by FEA (Finite Element Analysis), small in size but robust in structure. Self weight only 3.5kg for 10t capacity, current products on the market is 30kg
- ? CNC machining and ANYLOAD's stringent QC system create an outstanding performance of accuracy and repeatability in even the harshest environments
- ? High accuracy with 1:6,000 maximum divisions
- ? Guaranteed 400% of rated load for breaking load
- ? Transmits up to 30m for 110ES-WL
- ? Multiple patent designs



- Two perpendicular holes offer free swing in any direction when weighing, suitable for shackles commonly available in the market



- Power on / off switch with indicating light is salt water proof and equipped for extended operating time



- Antenna is protected by a silicon enclosure for protection and durability





- Salt water proof battery cap that is easy to open and lock. Transmitter is powered by four 16340.3 7V batteries which can provide 20 hours of non-stop operation



- Laser welded for protection from water and oil. IP rating: 68 / 69K

OUTLINE & DIMENSIONS

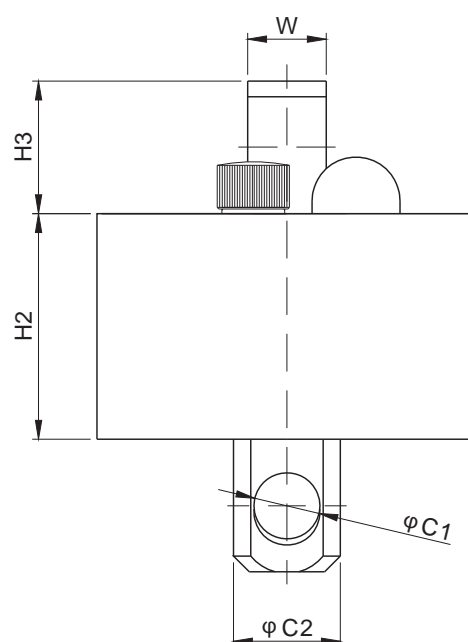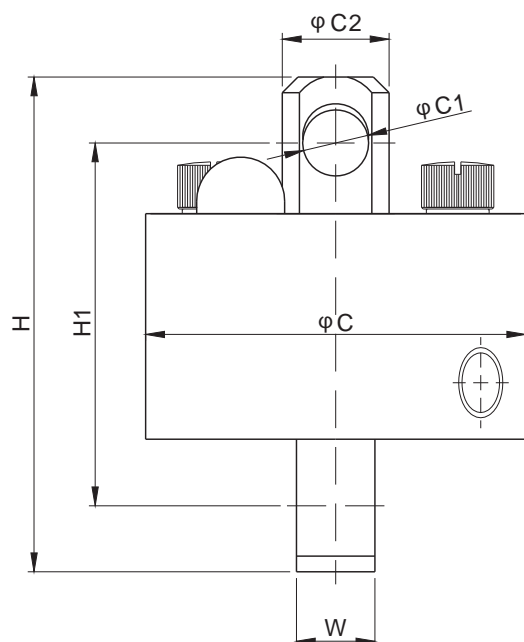

	C	C1	C2	H	H1	H2	H3	W
Rated Capacity (t)	Dimensions (mm)							
1	121	13	25	130.4	104	70	30.7	15.5
2.5	121	15	25	130.4	104	70	30.7	17
5	121	21	34	157.5	115.5	71.8	43.5	25
10	133	31.5	50	197	141.5	72	63.3	41
20	159	42	68	245	171	73.5	87	54
30	205	45	80	295	206	92	99.5	57
50	205	63	109	368	250	105	130	79
100	273	90	152	496	332	147	174	122

WIRELESS WEIGHING INDICATOR OPTIONS



P1 Receiver with Indicator



S2 Receiver with Printer

ABS enclosure	Stainless steel enclosure
Keyboard calibration	Keyboard calibration
Weighing data save protection in case of power off	Weighing data storage protection in case of power off
Battery charger with several protection modes	Battery charger with several protection modes
LCD display with backlight and dot characters	LCD display with backlight and dot characters
Standard parallel print interface (EPSON printer)	Standard parallel print interface(EPSON printer)
Fully charged battery works for 40 hours	Fully charged battery works for 30 hours
Power saving mode: automatically turns off after 30 minutes when not being operated	Power saving mode: automatically turns off after 30 minutes when not being operated
Portable design and packaging	Portable design and packaging
	Can gather up to 2000 weighing data records that can be sorted, searched and printed
	Available options :
	- Standard RS232 communication interface
	- Alloy steel enclosure (P2)